



This brochure has been designed to provide you with basic information prior to making a purchase decision. Please refer to your local dealer for additional information before you buy. Coachman Caravan Company Limited reserves the right to alter technical specifications, prices and model ranges as materials and conditions demand and can accept no responsibility for discrepancies between these and subsequent models. Household items illustrated in the brochure (e.g. fruit and personal effects) have been used to enhance photography and are not supplied with the caravan. Limitations in the printing process may mean colours are not truly represented. It should be noted that distributors and dealers are not the agents of Coachman Caravan Company Limited and therefore are not authorised to bind the Company by any specific or implied undertaking or representation. Please note: Touring caravans are designated by the model year. The model year runs from the 1st September to 31st August: for example a 2009 year model would have been despatched by the manufacturers no earlier than 15th August 2008. All Coachman models have been certified by the National Caravan Council for compliance with stringent European Standards, British Legislation and industry set Codes of Practice, specifically relating to health and safety issues. The approval process covers the testing and inspection of critical areas of the product from fire safety, weights and dimensions to gas, electrics and ventilation. Every Coachman caravan carries the 'NCC Approved Caravan' badge. The NCC also conducts unannounced inspections at the Coachman factory to ensure continued compliance. NCC Approval gives you peace of mind that your caravan is legal and safe.

The tow cars used in this brochure are for illustration purposes only.

As the owner of a Coachman caravan, you will be automatically entitled to membership of our Owners Club. For more information about the Club, please contact: The Secretary, Coachman Owners' Club, 2 Braemar Rise, South Hiendley, Barnsley, South Yorkshire S72 9DJ or visit their website: www.coachmanclub.co.uk

feelthedifference



The Touring Caravan



Coachman Caravan Company Limited

Amsterdam Road, Sutton Fields Industrial Estate,

Hull HU7 0XF Tel: 01482 839737

Aftercare: 01482 877405 www.coachman.co.uk

2009 Specifications



TECHNICAL SPECIFICATIONS 2009

| MODEL | 640/4 | 645/4 | 650/4 | 655/6 |
|---------------------------------|--|--|---|--|
| Number of Berths | 4 | 4 | 4 | 6 |
| Interior Length | 6190mm / 20' 4" | 6190mm / 20' 4" | 6190mm / 20' 4" | 6190mm / 20' 4" |
| Shipping Length | 7965mm / 26' 2" | 7965mm / 26' 2" | 7965mm / 26' 2" | 7965mm / 26' 2" |
| Overall Width | 2260mm/7'5" | 2260mm/7'5" | 2260mm/7'5" | 2260mm/7'5" |
| Overall Height (inc TV Aerial) | 2735mm / 9' | 2735mm / 9' | 2735mm / 9' | 2735mm / 9' |
| Maximum Headroom | 1955mm / 6' 5" | 1955mm / 6' 5" | 1955mm / 6' 5" | 1955mm / 6' 5" |
| Interior Width | 2110mm / 6' 11" | 2110mm / 6' 11" | 2110mm / 6' 11" | 2110mm / 6' 11" |
| Wheel Rim | 5.5J x 14 | 5.5J x 14 | 5.5J x 14 | 5.5J x 14 |
| Tyre Size | 175/65 R14 86 | 175/65 R14 86 | 175/65 R14 86 | 175/65 R14 86 |
| Tyre Pressure (at quoted MTPLM) | 44 psi / 3 bar | 44 psi / 3 bar | 44 psi / 3 bar | 44 psi / 3 bar |
| Bed Sizes mm | 2 x Single Combined in 'L' shape | 2 x Single Combined in 'L' shape | 2 x Single 1880 x 720 (5'11" x 2'4") | 2 x Single 1880 x 720 (6'2" x 2'4") |
| Option 1 | 1 x Double 1870 x 1370 (6'2" x 4'6") | 2 x Single 1910 x 760 (6'3" x 2'6") | 1680 x 720 (5'6" x 2'4") 1 x Double 1850 x 1370 (6'1" x 4'6") | 2 x Single 1830 x 720 (6'0" x 2'4") 2 x Single Bunk 1730 x 610 (5'8" x 2'0") |
| Bed Sizes mm | 1 x Double 2030 x 1320 (6'8" x 4'4") | 1 x Double 2030 x 1320 (6'8" x 4'4") | 1 x Double 2030 x 1220 (6'8" x 4'0") | 1 x Double 2030 x 1475 (6'8" x 4'10") |
| Option 2 | 1 x Double 1870 x 1370 (6'2" x 4'6") | 1910 x 760 (6'3" x 2'6") 1880 x 760 (6'2" x 2'6") | 1 x Double 1850 x 1370 (6'1" x 4'6") | 1 x Double 1980 x 1370 (6'6" x 4'6") 2 x Single Bunk 1730 x 610 (5'8" x 2'0") |
| M.T.P.L.M | 1840kg / 36.2cwt | 1825kg / 35.9cwt | 1810kg / 35.6cwt | 1860kg / 36.6cwt |
| Mass in Running Order | 1643kg / 32.3cwt | 1628kg / 32cwt | 1613kg / 31.8cwt | 1653kg / 32.5cwt |
| Essential Habitation Equipment | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt |
| Personal Payload | 140kg / 2.8cwt | 140kg / 2.8cwt | 140kg / 2.8cwt | 160kg / 3.1cwt |
| Options Payload | 10kg / 0.2cwt | 10kg / 0.2cwt | 10kg / 0.2cwt | 0kg / 0cwt |
| Total / Maximum User Payload | 197kg / 3.9cwt | 197kg / 3.9cwt | 197kg / 3.9cwt | 207kg / 4.1cwt |
| Empty Nose Weight | 44.5kg / 0.9cwt | 55kg / 1.1cwt | 76kg / 1.5cwt | 39.5kg / 0.8cwt |
| Maximum Hitch Weight | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt |
| Awning Measurements (to ground) | 1070 cm | 1070 cm | 1070 cm | 1070 cm |



TECHNICAL SPECIFICATIONS 2009

| MODEL | 460/2 | 520/4 | 535/4 | 545/4 |
|---------------------------------|---|---|--|--|
| Number of Berths | 2 | 4 | 4 | 4 |
| Interior Length | 4858mm / 15' 11" | 5514mm / 18'1" | 5500mm / 18' 1" | 5800mm / 19' 0" |
| Shipping Length | 6633mm / 21'9" | 7289mm / 23'11" | 7275mm / 23' 10" | 7575mm / 24' 10" |
| Overall Width | 2260mm / 7'5" | 2260mm / 7'5" | 2260mm / 7'5" | 2260mm / 7'5" |
| Overall Height (inc TV Aerial) | 2660mm / 8'9" | 2660mm / 8'9" | 2660mm / 8' 9" | 2660mm / 8' 9" |
| Maximum Headroom | 1955mm / 6'5" | 1955mm / 6'5" | 1955mm / 6' 5" | 1955mm/6'5" |
| Interior Width | 2110mm / 6'11" | 2110mm / 6'11" | 2110mm / 6' 11" | 2110mm/6'11" |
| Wheel Rim | 5.5J x 14 | 6.0J x 15 | 6.0J x 15 | 6.0J x 15 |
| Tyre Size | 185 R14 102 | 195/70 R15 104 | 195/70 R15 104 | 195/70 R15 104 |
| Tyre Pressure (at quoted MTPLM) | 65 psi / 4.5 bar | 65 psi / 4.5 bar | 65 psi / 4.5 bar | 65 psi / 4.5 bar |
| Bed Sizes mm | 2 x Single 1900 x 720 (6'3" x 2'4") | 2 x Single 1900 x 720 (6'3" x 2'4") | 2 x Single 1680 x 720 (5'6" x 2'4") | 2 x Single 1550 x 720 (5'1" x 2'4") |
| Option 1 | | 1 x Single 1795 x 710 (5'11" x 2'4") | 1 x Double 1955 x 1430 (6'5" x 4'8") | 1 x Double 1830 x 1370 (6'0" x 4'6") |
| Bed Sizes mm | 1 x Double 2030 x 1475 (6'8" x 4'10") | 1 x Double 2030 x 1475 (6'8" x 4'10") | 1 x Double 2030 x 1270 (6'8" x 4'2") | 1 x Double 2030 x 1110 (6'8" x 3'7") |
| Option 2 | | 1 x Single 1795 x 710 (5'11" x 2'4") | 1 x Double 1955 x 1430 (6'5" x 4'8") | 1 x Double 1830 x 1370 (6'0" x 4'6") |
| M.T.P.L.M | 1435kg / 28.2cwt | 1600kg / 31.5cwt | 1580kg / 31.1cwt | 1635kg / 32.2cwt |
| Mass in Running Order | 1281kg / 25.2cwt | 1420kg / 28cwt | 1392kg / 27.4cwt | 1444kg / 28.4cwt |
| Essential Habitation Equipment | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt |
| Personal Payload | 107kg / 2.1cwt | 133kg / 2.6cwt | 133kg / 2.6cwt | 136kg / 2.7cwt |
| Options Payload | 0kg / 0cwt | 0kg / 0cwt | 8kg / 0.2cwt | 8kg / 0.2cwt |
| Total / Maximum User Payload | 154kg / 3cwt | 180kg / 3.5cwt | 188kg / 3.7cwt | 191kg / 3.8cwt |
| Empty Nose Weight | 46kg / 0.9cwt | 48kg / 0.9cwt | 65kg / 1.3cwt | 56kg / 1.1cwt |
| Maximum Hitch Weight | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt |
| Awning Measurements (to ground) | 935 cm | 1000 cm | 999 cm | 1029 cm |




TECHNICAL SPECIFICATIONS 2009

| MODEL | 460/2 | 470/2 | 520/4 | 530/4 | 535/4 |
|---------------------------------|---|---|--|--|--|
| Number of Berths | 2 | 2 | 4 | 4 | 4 |
| Interior Length | 4858mm / 15' 11" | 5000mm / 16' 5" | 5514mm / 18' 1" | 5487mm / 18' 0" | 5500mm / 18' 1" |
| Shipping Length | 6633mm / 21' 9" | 6775mm / 22' 3" | 7289mm / 23' 11" | 7262mm / 23' 10" | 7275mm / 23' 10" |
| Overall Width | 2260mm/7'5" | 2260mm/7'5" | 2260mm/7'5" | 2260mm/7'5" | 2260mm/7'5" |
| Overall Height (inc TV Aerial) | 2660mm / 8' 9" | 2660mm / 8' 9" | 2660mm / 8' 9" | 2660mm / 8' 9" | 2660mm / 8' 9" |
| Maximum Headroom | 1955mm/6'5" | 1955mm/6'5" | 1955mm/6'5" | 1955mm/6'5" | 1955mm/6'5" |
| Interior Width | 2110mm/6'11" | 2110mm/6'11" | 2110mm/6'11" | 2110mm/6'11" | 2110mm/6'11" |
| Wheel Rim | 5.5J x 14 | 5.5J x 14 | 6.0J x 15 | 6.0J x 15 | 6.0J x 15 |
| Tyre Size | 185 R14 102 | 185 R14 102 | 195/70 R15 104 | 195/70 R15 104 | 195/70 R15 104 |
| Tyre Pressure (at quoted MTPLM) | 65 psi / 4.5 bar | 65 psi / 4.5 bar | 65 psi / 4.5 bar | 65 psi / 4.5 bar | 65 psi / 4.5 bar |
| Bed Sizes mm | 2 x Single 1900 x 720 (6'3" x 2'4") | 2 x Single 1900 x 720 (6'3" x 2'4") | 2 x Single 1680 x 720 (5'6" x 2'4") | 2 x Single 1680 x 720 (5'6" x 2'4") | 2 x Single 1680 x 720 (5'6" x 2'4") |
| Option 1 | | | 1 x Single 1795 x 710 (5'11" x 2'4") | 1 x Double 1955 x 1430 (6'5" x 4'8") | 1 x Double 1955 x 1430 (6'5" x 4'8") |
| Bed Sizes mm | 1 x Double 2030 x 1475 (6'8" x 4'10") | 1 x Double 2030 x 1475 (6'8" x 4'10") | 1 x Double 2030 x 1270 (6'8" x 4'2") | 1 x Double 2030 x 1270 (6'8" x 4'2") | 1 x Double 2030 x 1270 (6'8" x 4'2") |
| Option 2 | | | 1 x Single 1795 x 710 (5'11" x 2'4") | 1 x Double 1955 x 1430 (6'5" x 4'8") | 1 x Double 1955 x 1430 (6'5" x 4'8") |
| M.T.P.L.M | 1420kg / 28cwt | 1440kg / 28.3cwt | 1595kg / 31.4cwt | 1585kg / 31.2cwt | 1565kg / 30.8cwt |
| Mass in Running Order | 1263kg / 24.9cwt | 1282kg / 25.2cwt | 1412kg / 27.8cwt | 1394kg / 27.4cwt | 1374kg / 27cwt |
| Essential Habitation Equipment | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt |
| Personal Payload | 107kg / 2.1cwt | 108kg / 2.1cwt | 133kg / 2.6cwt | 133kg / 2.6cwt | 133kg / 2.6cwt |
| Options Payload | 3kg / 0.1cwt | 3kg / 0.1cwt | 3kg / 0.1cwt | 11kg / 0.2cwt | 11kg / 0.2cwt |
| Total / Maximum User Payload | 157kg / 3.1cwt | 158kg / 3.1cwt | 183kg / 3.6cwt | 191kg / 3.8cwt | 191kg / 3.8cwt |
| Empty Nose Weight | 46kg / 0.9cwt | 45kg / 0.9cwt | 47kg / 0.9cwt | 50kg / 1cwt | 64kg / 1.3cwt |
| Maximum Hitch Weight | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt |
| Awning Measurements (to ground) | 935 cm | 949 cm | 1000 cm | 998 cm | 999 cm |



TECHNICAL SPECIFICATIONS 2009

| MODEL | 380/2 | 450/2 | 520/4 | 535/4 | 550/5 | 560/6 | 640/6 |
|---------------------------------|--|--|--|--|--|--|--|
| Number of Berths | 2 | 2 | 4 | 4 | 5 | 6 | 6 |
| Interior Length | 3973mm / 13' 0" | 4675mm / 15'4" | 5428mm / 17'10" | 5500mm / 18' 1" | 5620mm / 18'5" | 5575mm / 18'3" | 6171mm / 20' 3" |
| Shipping Length | 5728mm / 18'10" | 6430mm / 21' 1" | 7183mm / 23' 7" | 7255mm / 23' 10" | 7375mm / 24'2" | 7330mm / 24'1" | 7926mm / 26' 0" |
| Overall Width | 2260mm / 7'5" | 2260mm / 7'5" | 2260mm / 7'5" | 2260mm / 7'5" | 2260mm / 7'5" | 2260mm / 7'5" | 2260mm / 7'5" |
| Overall Height (inc TV Aerial) | 2610mm / 8'7" | 2610mm / 8'7" | 2610mm / 8'7" | 2610mm / 8'7" | 2610mm / 8'7" | 2610mm / 8'7" | 2610mm / 8'7" |
| Maximum Headroom | 1911mm / 6'3" | 1911mm / 6'3" | 1911mm / 6'3" | 1911mm / 6'3" | 1911mm / 6'3" | 1911mm / 6'3" | 1911mm / 6'3" |
| Interior Width | 2110mm / 6'11" | 2110mm / 6'11" | 2110mm / 6'11" | 2110mm / 6'11" | 2110mm / 6'11" | 2110mm / 6'11" | 2110mm / 6'11" |
| Wheel Rim | 5.5J x 14 | 5.5J x 14 | 5.5J x 14 | 5.5J x 14 | 6.0J x 15 | 6.0J x 15 | 5.5J x 14 |
| Tyre Size | 175 R14 99 | 185 R14 102 | 185 R14 102 | 185 R14 102 | 195/70 R15 104 | 195/70 R15 104 | 175/65R14 86 |
| Tyre Pressure (at quoted MTPLM) | 65 psi / 4.5 bar | 65 psi / 4.5 bar | 65 psi / 4.5 bar | 65 psi / 4.5 bar | 65 psi / 4.5 bar | 65 psi / 4.5 bar | 44 psi / 3 bar |
| Bed Sizes mm | 2 x Single 1900 x 720 (6'0" x 2'4") | 2 x Single 1830 x 720 (6'0" x 2'4") | 2 x Single 1680 x 720 (6'0" x 2'4") | 2 x Single 1680 x 720 (5'6" x 2'4") | 2 x Single 1830 x 720 (6'0" x 2'4") | 2 x Single 1830 x 720 (6'0" x 2'4") | 2 x Single 1830 x 720 (6'0" x 2'4") |
| Option 1 | | | 1 x Single 1820 x 710 (6'0" x 2'4") | 1 x Double 1955 x 1430 (6'5" x 4'8") | 1 x Double 2030 x 1370 (6'8" x 4'6") | 1 x Double 2030 x 1370 (6'8" x 4'6") | 1 x Double 2030 x 1370 (6'8" x 4'6") |
| Bed Sizes mm | 1 x Double 2030 x 1420 (6'8" x 4'8") | 1 x Double 2030 x 1420 (6'8" x 4'8") | 1 x Double 2030 x 1420 (6'8" x 4'8") | 1 x Double 2030 x 1270 (6'8" x 4'2") | 1 x Double 2030 x 1420 (6'8" x 4'8") | 1 x Double 2030 x 1420 (6'8" x 4'8") | 1 x Double 2030 x 1420 (6'8" x 4'8") |
| Option 2 | | | 1 x Single 1820 x 710 (6'0" x 2'4") | 1 x Double 1955 x 1430 (6'5" x 4'8") | 1 x Single Bunk 1760 x 610 (5'9" x 2'0") | 1 x Single Bunk 1830 x 610 (6'0" x 2'0") | 1 x Double 2030 x 1370 (6'8" x 4'6") |
| M.T.P.L.M | 1200kg / 23.6cwt | 1340kg / 26.4cwt | 1500kg / 29.5cwt | 1480kg / 29.1cwt | 1590kg / 31.3cwt | 1575kg / 31cwt | 1710kg / 33.7cwt |
| Mass in Running Order | 1048kg / 20.6cwt | 1181kg / 23.2cwt | 1314kg / 25.9cwt | 1293kg / 25.5cwt | 1392kg / 27.4cwt | 1367kg / 26.9wt | 1496kg / 29.4cwt |
| Essential Habitation Equipment | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt | 47kg / 0.9cwt |
| Personal Payload | 98kg / 1.9cwt | 105kg / 2.1cwt | 132kg / 2.6cwt | 133kg / 2.6cwt | 144kg / 2.8cwt | 154kg / 3cwt | 160kg / 3.1cwt |
| Options Payload | 7kg / 0.1cwt | 7kg / 0.1cwt | 7kg / 0.1cwt | 7kg / 0.1cwt | 7kg / 0.1cwt | 7kg / 0.1cwt | 7kg / 0.1cwt |
| Total / Maximum User Payload | 152kg / 3.1cwt | 159kg / 3.1cwt | 186kg / 3.7cwt | 187kg / 3.7cwt | 198kg / 3.9cwt | 208kg / 4.1cwt | 214kg / 4.2cwt |
| Empty Nose Weight | 46kg / 0.9cwt | 36kg / 0.7cwt | 45kg / 0.9cwt | 65kg / 1.3cwt | 57kg / 1.1cwt | 49kg / 1cwt | 60kg / 1.2cwt |
| Maximum Hitch Weight | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt | 100kg / 1.9cwt |
| Awning Measurements (to ground) | 825cm | 890cm | 965cm | 980cm | 992cm | 988cm | 1050cm |

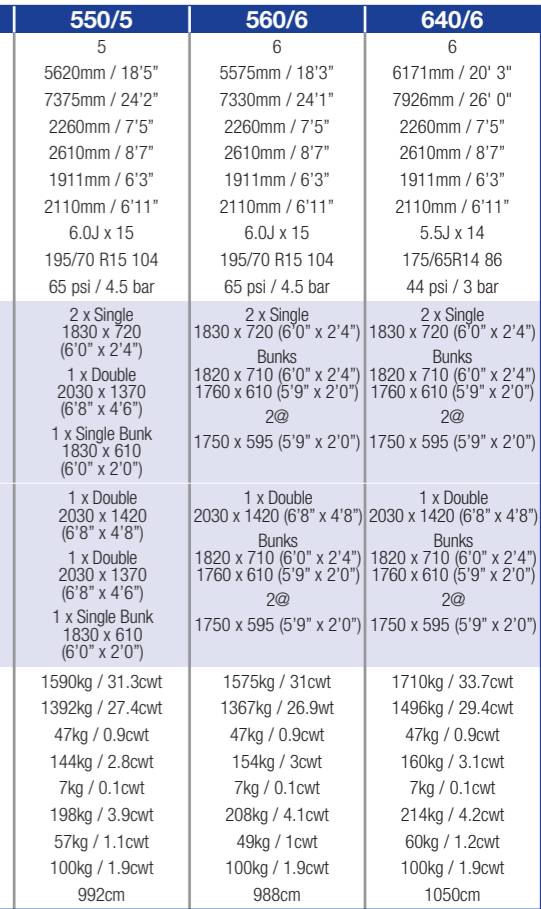

Awning dimensions represent the shortest ground to ground awning measurements for 2009 model year Coachman Caravans. We do however strongly recommend that you consult your awning supplier before making a purchase as awning manufacturers have different methods of sizing their products.